

ReneSola

125 Series Monocrystalline Solar Module

190W, 195W, 200W



High Module Conversion Efficiencies



Easy Installation and Handling




Mechanical Load Capability of up to 5400 Pa



Conforms with IEC 61215:2005,
IEC 61730: 2004, UL 1703 PV Standards



ISO9001, OHSAS18001, ISO14001 Certified

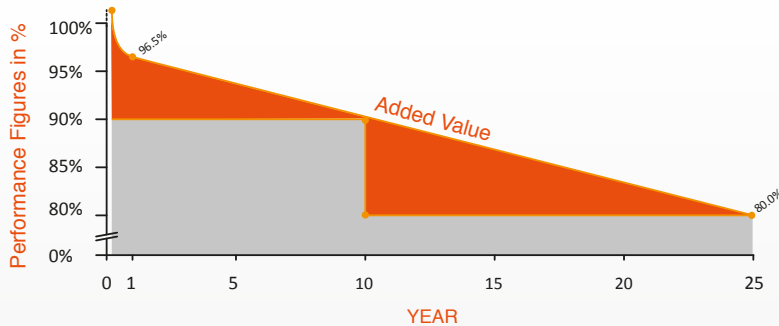

10-year
material & workmanship


25-year
linear power output



APPROVED PRODUCT




Dimensions

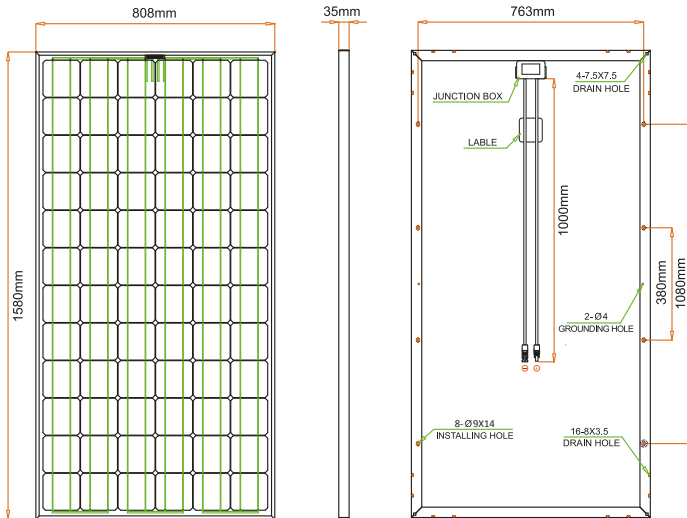

Drawing Only for Reference

I-V Curves

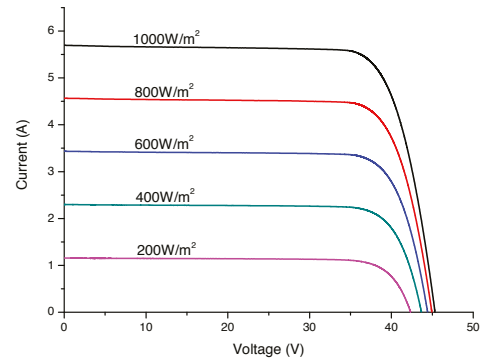

Varied Irradiation Efficiencies

Irradiance	200W/m ²	400W/m ²	600W/m ²	800W/m ²	1000W/m ²
Efficiency	15.4%	15.8%	15.8%	15.8%	15.7%

Electrical Characteristics STC

	JC190S-24/Db	JC195S-24/Db	JC200S-24/Db
Maximum Power (Pmax)	190 W	195 W	200 W
Power Tolerance	0 ~ +5W	0 ~ +5W	0 ~ +5W
Module Efficiency	14.9%	15.3%	15.7%
Maximum Power Current (Imp)	5.19 A	5.32 A	5.41 A
Maximum Power Voltage (Vmp)	36.6 V	36.7 V	37.1 V
Short Circuit Current (Isc)	5.49 A	5.61 A	5.70 A
Open Circuit Voltage (Voc)	44.9 V	45.0 V	45.3 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT

	JC190S-24/Db	JC195S-24/Db	JC200S-24/Db
Maximum Power (Pmax)	140 W	144 W	147 W
Maximum Power Current (Imp)	4.13 A	4.22 A	4.27 A
Maximum Power Voltage (Vmp)	34.0 V	34.2 V	34.5 V
Short Circuit Current (Isc)	4.42 A	4.52 A	4.60 A
Open Circuit Voltage (Voc)	42.1 V	42.3 V	42.4 V

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics

Cell Type	125 x125 mm Monocrystalline, 72 (6x12) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65/IP67 rated, with bypass diodes
Dimension	*1580 x 808 x 35 mm
Output Cable	4 mm ² (EU)/12 AWG (US), 1000 mm
Weight	16 Kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of Voc	-0.31%/°C
Temperature Coefficient of Isc	0.03%/°C
Temperature Coefficient of Pmax	-0.43%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Packing Information

	20' GP	40' GP	40' HQ
Container	20' GP	40' GP	40' HQ
Pallets per Container	12	28	28
Pieces per Container	372	868	952

Maximum Ratings

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1000VDC (EU) / 600VDC (US)
Maximum Series Fuse Rating	15A (EU) / 10A (US)

Rev No.: JC/TDS/2012.06 *Contact ReneSola for tolerance specification
CAUTION: All rights reserved. Design and specification are subject to change without prior notice.